


Approved to UL standards by CSA

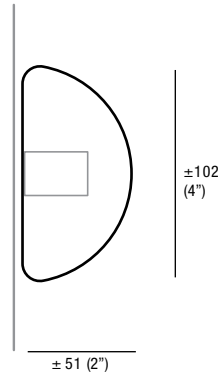

approx 1 (2lb)

The 14 sconce is an articulated cast glass hemisphere with a frosted cylindrical void that houses a low voltage (12V, 10W halogen/xenon lamp) or LED (12V, 0.3W) lamp. Individual sconces are visually quite subtle, but gain tremendous strength when multiplied and clustered in large groups. Light interacts with the bubbles and imperfections of the cast glass to produce a glow reminiscent of small candles floating within a hemisphere of water. Cast glass is an organic process, imperfect by nature and each 14 sconce is hand made; thus, every piece produced is unique.

APPLICATIONS

Suitable for residential and commercial use. CSA and CE approved; approved to UL standards by CSA. The 14 sconce is designed to be used as a wall treatment for a wide range of environments. Use it as accessory lighting in living rooms, hallways or as decorative lighting in building lobbies and other spaces.

MATERIALS

Cast glass and electrical components


Note: Up to 5 sconces may be connected to a single class 2 transformer.

Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

For additional information, please contact:

BOCCI Vancouver
 info@bocci.ca
 www.bocci.ca

BOCCI Berlin
 infoeu@bocci.ca
 www.bocci.ca




1

Mount transformer remotely, Route output wiring from transformer to sconce location.


Note: Up to 5 sconces may be connected to a single transformer.

Note: Standard junction boxes are not compatible with the 14s. The sconce cover plate mounts directly to the wall. Transformers must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance.

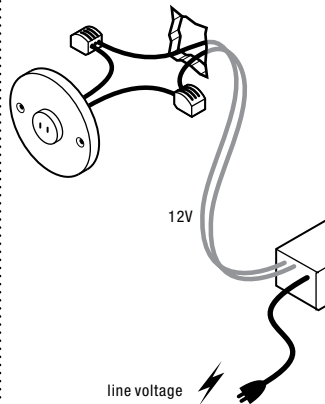

2


Join transformer wiring to cover plate wiring using connectors provided.

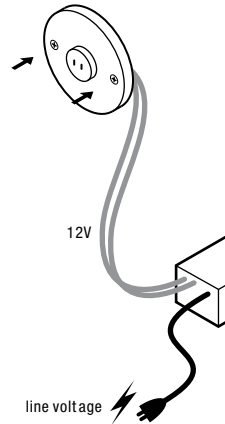

3

Tuck wiring into wall opening and affix the cover plate with fasteners provided.

Connect transformers to line voltage.




4

Lamp fixture using Bocci 24.1 long life bipin xenon lamp, standard 10W halogen bipin lamp, or Bocci 24.2 LED.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.

Purchase online for replacement lamps at www.bocci.ca

Please note: when using a dimmer use only low voltage electronic dimmers to ensure the fixture works properly.



5

Gently thread cast glass hemisphere on to cover plate. Do not tighten past the point of contact.

6

Clean fingerprints from glass surfaces.

Turn fixture on.

*

For additional assistance, please contact Bocci:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
infoeu@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA



14s

Design by Omer Arbel
INSTALLATION INSTRUCTIONS

BOCCI
Vancouver
Berlin