

- PENDANTS: one
- CANOPY: mini canopy 29 (1.1') diameter and 13mm (0.5') deep
- LAMPING: 2.3W LED
- LENGTH OF COAX: 3000 (10') standard / 30500 (100') maximum
- INSTALLATION: strain relief (pendant length site adjustable)
- MATERIALS: blown glass, braided metal coaxial cable, electrical components, brushed nickel canopy
- WEIGHT: standard 2-4 kg (4-8 lbs) | oversize 4-5 kg (8-11 lbs)
- TRANSFORMERS: remote (does not hook directly to a junction box. 1 transformer sent with every 3 pendants).

DESCRIPTION

The 'm' designation in this 73 variant refers to the mini canopy size. The mini canopy is just over 1" (29mm) in diameter and 0.5" (13mm) deep, which creates a subtle profile that will essentially disappear into the application surface. The pendant drop lengths on this chandelier are adjustable up to the specified maximum.

The 73 is formed by blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. Each 73 is completely unique in proportion, size and shape.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + All chandeliers will be outfitted to be LED compatible.
- + Requires transformers to be remote mounted

US patent # US 29/474,814
 Worldwide patents issued and pending.
 Made in Vancouver, Canada


Vancouver
sales@bocci.ca
www.bocci.ca

Berlin
europa@bocci.ca
www.bocci.ca

~3 - 7kg (6 - 15lb)


73.1m

Design by Omer Arbel
 PRODUCT SPECIFICATION

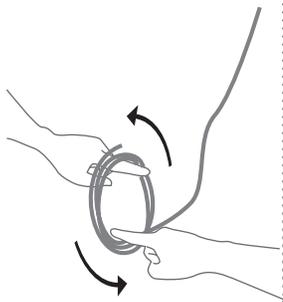

1


Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.

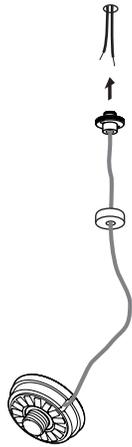

2

Drill a 9mm diameter hole in ceiling material. Pull low voltage house wire through the hole.


Note: This low voltage wire will run to a remote mounted transformer.

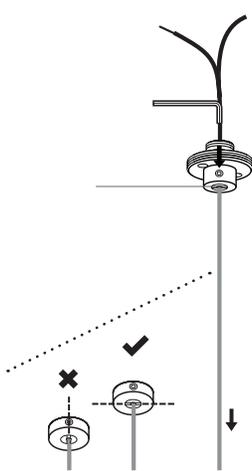

3

Determine the overall drop for the pendant fixture. Use the Allen key provided to loosen the setscrew in the canopy and gently feed the cable through the canopy until you have reached your desired drop length. Use Allen key to tighten the setscrew to 0.5 Nm to hold the strain relief to secure the coaxial cable at its new length.


Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to the set screw chamber. There can be no contact between the set screw and the cable
- RISK OF ELECTRIC SHORT!

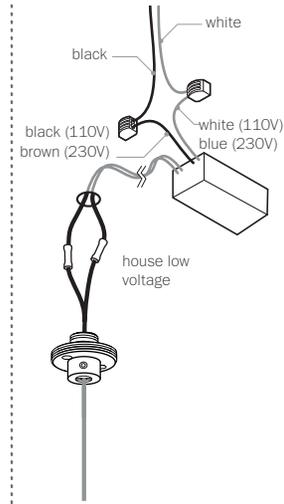

4

Connect the house wires to the coaxial cable using #16 butt splices (stagger the splices). Use raw butt splices and heat shrink to simplify the installation.


LED:
Note: Insulated core is positive and braided exterior is negative.

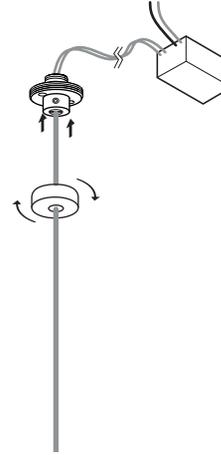

5

Affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded canopy cover plate into place.

Note: It may be helpful to rest the pendant on a surface higher than its final position so that the canopy may be fastened with greater ease.

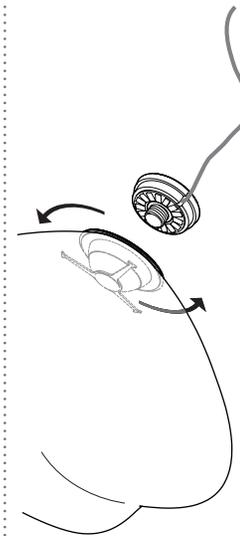

6

Bocci 24.3 LED has already been installed on the cap.

To attach the glass pendant to the cap simply rotate it on. Note: Rotate the glass - not the cap, otherwise the coax will twist.

Purchase replacement LEDs online at www.bocci.ca/lamps

7

Clean fingerprints from glass surfaces.

Turn fixture on.

*
For additional assistance, please contact Bocci:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

Made in Vancouver, Canada

Approved to UL standards by CSA



73.1m

Design by Omer Arbel
INSTALLATION INSTRUCTIONS