

- PENDANTS: three
- CANOPY: brushed-nickel canopy 152mm (6") in diameter and 32mm (1.3") deep
- LAMPING: 2.3W LED
- LENGTH OF COAX: 3000 (10') standard / 30500 (100') maximum
- INSTALLATION: strain relief (pendant length site adjustable)
- MATERIALS: blown glass, braided metal coaxial cable, electrical components, brushed nickel canopy
- WEIGHT: 10kg - 12kg (22 - 26lb) complete, individual pendants: standard 2-4 kg (4-8 lbs) | oversize 4-5 kg (8-11 lbs)
- TRANSFORMERS: transformer designed to fit into a standard junction box. (1 transformer sent with every pendant)

DESCRIPTION

73.3 is a random configuration of three 73 pendants hung from a round canopy. The drop lengths of the pendants are randomized between a client specified range of heights to variously cluster and scatter. The result is an ambient chandelier or field of light.

The 73 is formed by blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. Each 73 is completely unique in proportion, size and shape.

NOTES


- + Purchase replacement lamps online at www.bocci.ca/lamps
- + All chandeliers will be outfitted to be LED compatible.
- + As an alternative to the junction box transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

US patent # US 29/474,814
Worldwide patents issued and pending.
Made in Vancouver, Canada

Vancouver
sales@bocci.ca
www.bocci.ca


Berlin
europe@bocci.ca
www.bocci.ca

~10 - 12kg (22 - 26lb)




1

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.

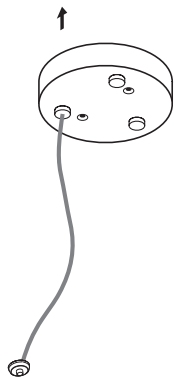

2


Thread the coaxial cable through the canopy.

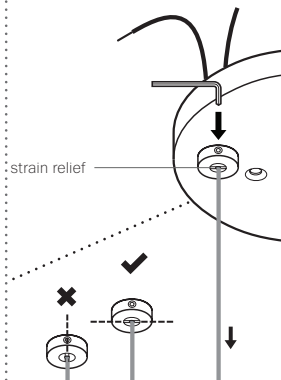

3

Determine the overall drop for the pendant fixture. Use the Allen key provided to loosen the setscrew in the canopy and gently feed the cable through the canopy until you have reached your desired drop length. Use Allen key to tighten the setscrew hold the strain relief to secure the coaxial cable at its new length. **DO NOT OVERTIGHTEN.**


Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to the set screw chamber. There can be no contact between the set screw and the cable.
- RISK OF ELECTRIC SHORT!

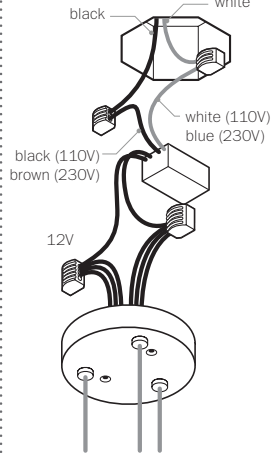

4

Connect the coaxial cable to the open slots in the terminal block on the 12V side of the LED driver. Ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.


Once all the coaxial connections are made, lift the fixture into position and connect the line voltage to the open slot in the appropriate terminal block.

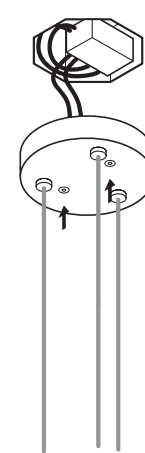

5

Tuck the transformer and wiring into the octagonal box, if available, and place canopy cover plate, lining up the fastener holes or connect directly to structural ceiling surface. Affix canopy cover with fasteners provided.

Note: It may be helpful to rest the pendant on a surface higher than its final position so that the canopy may be fastened with greater ease.

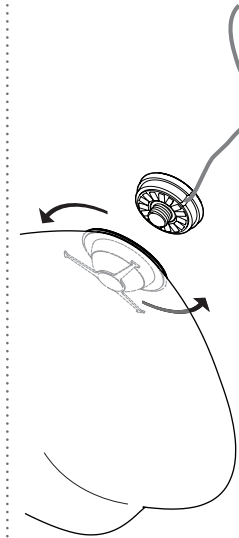


6

Bocci 24.3 LED has already been installed on the cap.

To attach the glass pendant to the cap simply rotate it on. Note: Rotate the glass - not the cap, otherwise the coax will twist.

Purchase replacement LEDs online at www.bocci.ca/lamps

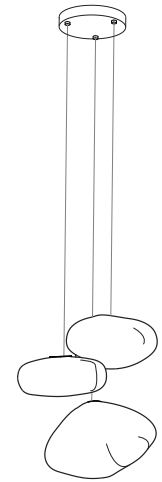

7

Clean fingerprints from glass surfaces.

Turn fixture on.

*

For additional assistance, please contact Bocci:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

Made in Vancouver, Canada

Approved to UL standards by CSA

