




Approved to UL standards by CSA



14.1m

Design by Omer Arbel
PRODUCT SPECIFICATION

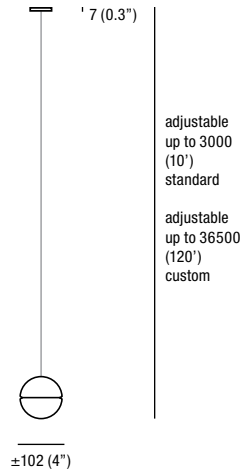

approx 2kg (4lb)

The 14 is an articulated, seamed cast glass sphere with a frosted cylindrical void that houses either a low voltage (12V, 10W halogen/xenon) or LED(12V, 0.3W) lamp. Individual pendants are visually quite subtle, but gain tremendous strength when multiplied and clustered in large groups. Light interacts with the bubbles and imperfections of the cast glass to produce a glow reminiscent of small candles floating within spheres of water. Cast glass is an organic process, imperfect by nature and each 14 is hand made; thus, every piece produced is unique.

APPLICATIONS

Suitable for residential and commercial use. CSA, CE approved; approved to UL standards by CSA. Popular applications to date include clusters over tables in residential dining rooms and restaurants, accessory lighting in living rooms, decorative lighting, linear configurations or clusters over bars and kitchen islands, and large chandeliers in building lobbies and other public spaces.

MATERIALS

Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components and a brushed nickel canopy.

Purchase online for replacement lamps at www.bocci.ca/lamps


Worldwide patents issued and pending. US patent # D556, 361
Made in Vancouver, Canada

For additional information, please contact:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
infoeu@bocci.ca
www.bocci.ca

BOCCI
Vancouver
Berlin

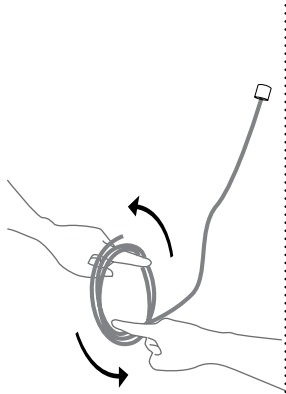

1


Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index finger into opposite sides of the roll of coaxial cable then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks



2

Drill a 9mm diameter hole in ceiling material. Pull low voltage house wire through the hole.

Note: This low voltage wire will run to a remote mounted transformer.

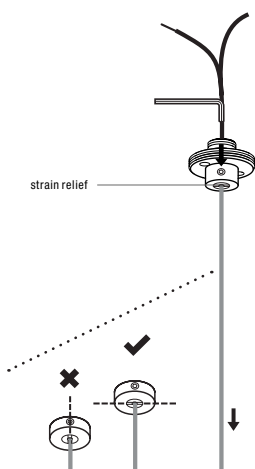


3

Thread the coaxial cable through the canopy. Throughout installation be mindful not to damage the borosilicate tube inside the pendant.

Determine the overall drop for the pendant fixture. Use the hex key provided to loosen the setscrew in the canopy and gently feed the cable through the canopy until you have reached your desired drop length. Use hex key to tighten the setscrew into the strain relief to secure the coaxial cable at its new length.


Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable
- RISK OF ELECTRIC SHORT!

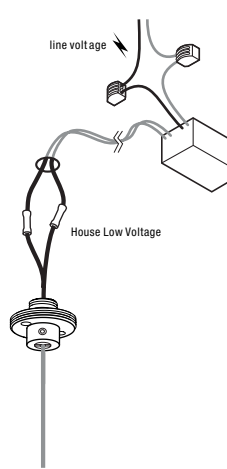

4

Connect the house wires to the coaxial cable using #16 butt splices (stagger the splices). Use raw butt splices and heat shrink to simplify the installation.


LED:
Note: Insulated core is positive and braided exterior is negative.

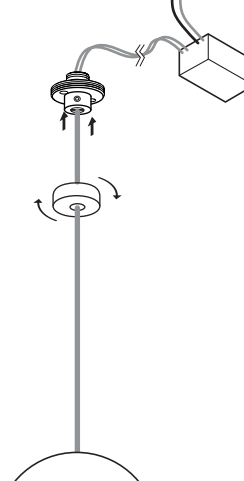

5

Affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded canopy cover plate into place.

Note: It may be helpful to rest the pendant on a surface higher than its final position so that the canopy may be fastened with greater ease.

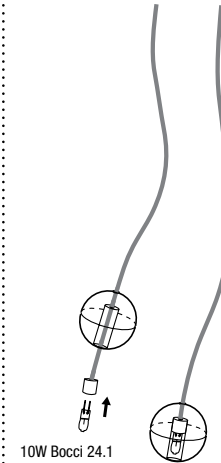


6

Lamp fixture using Bocci 24.1 long life bipin xenon lamp, standard 10W halogen bipin lamp, or Bocci 24.2 LED.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.

Purchase online for replacement lamps at www.bocci.ca/lamps

Note: when using a dimmer for xenon / halogen, use only low voltage electronic dimmer to ensure the fixture works properly.

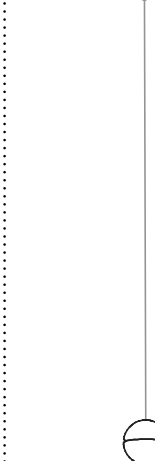

7

Clean fingerprints from glass surfaces.

Turn fixture on.

*
For additional assistance, please contact Bocci:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
infoeu@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA



BOCCI
Vancouver
Berlin

14.1m Design by Omer Arbel
INSTALLATION INSTRUCTIONS